



Concave print wheel

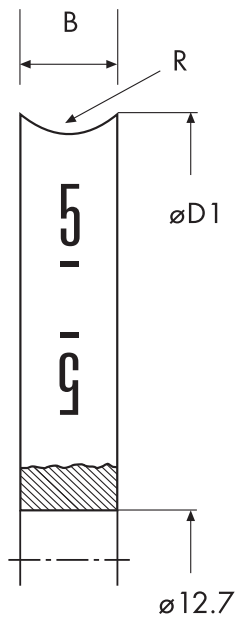

Plane print wheel

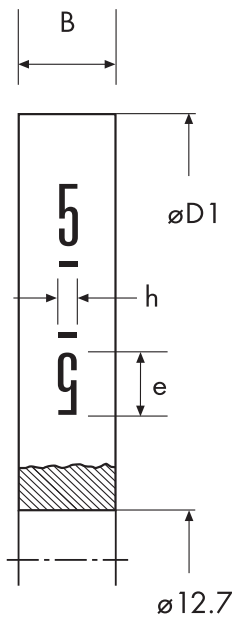

size concave	cable -ø (mm) from- to	ø D1 (mm)	B (mm)	R (mm)	Recommended size of character (h) (e) x (h)	
C-10-001	1,1-1,2	86.0	1.8	1.0	0.6	2.3 x 0.6
C-10-002	1,1-1,3	86.0	2.0	1.2	0.6	2.3 x 0.6 or 3.0 x 1.0
C-10-003	1,3-1,6	86.0	2.4	1.3	0.7	2.3 x 0.6 or 3.0 x 1.0
C-10-004	1,7-2,2	86.0	2.6	1.6	0.7	3.0 x 1.0 or 3.8 x 1.2
C-10-005	1,7-2,2	86.0	3.2	1.9	1.2	3.0 x 1.0 or 3.8 x 1.2
C-10-006	2,3-3,2	86.0	4.0	2.4	1.4	3.8 x 1.2 or 4.8 x 1.6
C-10-007	3,3-5,0	86.0	4.8	3.2	1.6	4.8 x 1.6
C-10-008	4,6-5,6	86.0	5.0	4.0	1.8	5.6 x 2.0
C-10-009	4,6-5,6	86.0	6.0	4.0	1.8	5.6 x 2.0
C-10-012	4,8-6,3	86.0	6.0	5.0	2.0	5.6 x 2.0
C-10-014	4,8-6,5	86.0	8.0	4.5	2.0	
C-10-010	5,7-7,8	86.0	8.4	5.6	2.2	
C-10-011	6,0-9,0	86.0	9.5	5.5	2.4	

size plane direct	ø D1 (mm)	W (mm)	h (mm)	Recommended size of character
F-20-007	86.0	7.62		about 30% from cable - ø
F-20-008	86.0	8.0		
F-20-010	86.0	10.0		
F-20-011	86.0	11.0		
F-20-012	86.0	12.0		
F-20-014	86.0	14.0		
F-20-016	86.0	16.0		

size plane indirect	ø D1 (mm)	W (mm)	h (mm)	Recommended size of character
F-21-010	80.0	10.0		about 50% from cable - ø
F-21-024	80.0	24.0		
F-21-030	80.0	30.0		